



PCT/EP200 4 / 0 5 0 8 7 6

EP04/050876



INVESTOR IN PEOPLE

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House

Cardiff Road

Newport REC'D 28 JUN 2004

South Wales

NP10 800


PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

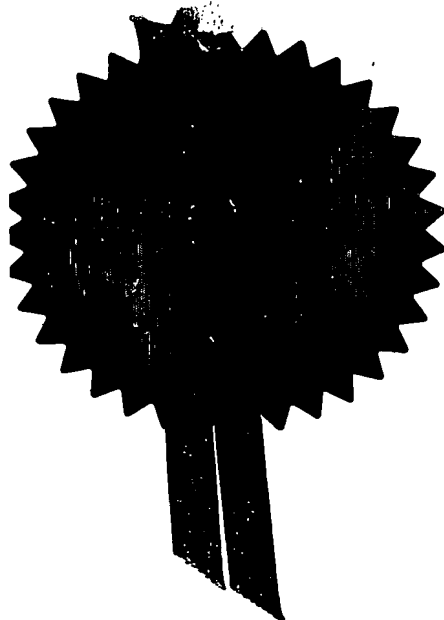

Signed

*Stephen Hordley*

Dated

18 May 2004

**BEST AVAILABLE COPY**

Patents Form 1/77

THE PATENT OFFICE  
CR  
- 4 JUL 2003  
RECEIVED BY FAX

The  
Patent  
Office

JUL03 13:20:04 1 003719  
0177708 0:00-0315599.1

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

4 JUL 2003

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

- Your reference  
CM06000EI/PGS/GBRI/LCC/BEN-AYUN
- Patent application number  
(The Patent Office will fill in this part)  
0315599.1
- Full name, address and postcode of the or of each applicant (stating all surnames)  
MOTOROLA, INC  
1303 EAST ALGONQUIN ROAD,  
SCHAUMBURG, ILLINOIS 60196,  
U.S.A.  
Patents ADP number (if you know it)  
-08284407001- 08488371001  
If the applicant is a corporate body, give the country/state of its incorporation  
U.S.A. DELAWARE
- Title of the invention  
CARTESIAN LOOP TRANSMITTER AND METHOD OF ADJUSTING AN OUTPUT LEVEL OF SUCH TRANSMITTER
- Name of your agent (if you have one)  
DEREK JAMES MCCORMACK  
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)  
EUROPEAN INTELLECTUAL PROPERTY DEPARTMENT  
MIDPOINT  
ALENCON LINK  
BASINGSTOKE  
HAMPSHIRE RG21 7PL  
UK  
ADP NO: 08004480886- 08128241001  
Patents ADP number (if you know it)
- If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number  

Country	Priority application number (if you know it)	Date of filing (day / month / year)
---------	--	-------------------------------------
- If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application  

Number of earlier application	Date of filing (day / month / year)
-------------------------------	-------------------------------------
- Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:  
a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (d))  
☒ YES ☐ NO

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 14

Claim(s) 5

Abstract 1

Drawing(s) 3

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 4

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) 1

Any other documents 1 x FEE SHEET  
(Please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

*Derek James McCormack*

Date

3/7/2003

12. Name and daytime telephone number of person to contact in the United Kingdom

DEREK JAMES MCCORMACK

Louise CRISTOFOLI

01256 790589

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

Cartesian Loop Transmitter And Method Of Adjusting An  
Output Level Of Such Transmitter

5

Field of the Invention

The present invention relates to radio linear transmitters. More specifically, it relates to a linear transmitter, whose stability of operation is maintained without an isolator and a method of adjusting an output level of such transmitter.

10

Background of the Invention

Radio communication devices use antennas to provide for the efficient transmission of radio frequency (RF) communication signals. The transmitter portion of a communication device includes a power amplifier to amplify the radio frequency signals before they are coupled to the antenna for transmission. As modern radio communication systems work in narrow frequency bands the transmitters' circuitries require RF power amplifiers able to operate in a linear fashion. Linear amplification is required to prevent distortion of the modulated signal and minimizing the interference.

However non-linearity of real world RF amplifiers appears when they are operated at high drive levels. Similar situations may be caused by operating conditions. For example, a transmitter operating near an electromagnetically reflective structure may be susceptible to energy reflected back through the antenna into the transmitter.

20

25

30

There are known in the art transmitters with improved linearity. One method of linearization of transmitters is to use a Cartesian feedback loop based

35

linearizer. The Cartesian feedback linearizer allows maintaining linearity of the transmitter while still allowing RF power amplifier to work close to its saturation point thus maintaining good efficiency. To  
5 protect against changes in load impedance as a result of reflected energy, an isolator or circulator is often inserted between the antenna and the power amplifier. The isolator protects the power amplifier by absorbing the reflected energy and preventing it from reaching the  
10 amplifier. The isolator directs the reflected energy to an absorptive load termination. Although the isolator generally works well, it adds significant cost, size, and weight to the design of a radio communication device. Isolators are narrowband, expensive and have  
15 large physical dimensions (especially at low frequencies).

There are also known in the art Cartesian loop transmitters without isolators. One such example is  
20 described in US patent application no. US2003/0031271. In this document a method for isolator elimination is disclosed. In this prior art solution an isolator eliminator provides phase and level correction signals on the basis of samples of an information signal and a  
25 drive signal sampled from a feedback loop. These correction signals maintain stability the operation of the transmitter.

#### Summary of the Invention

30 The term LP2 herein below refers to a point in the transmitter circuit located between loop poles and zeros and upmixer.

The term small signal herein below refers to any signal transmitted by the transmitter whose level is significantly below the baseband signal level.

5        There is a need for an apparatus and a method for adjusting an output level of a Cartesian loop transmitter which alleviate or overcome the disadvantages of the prior art.

10        According to a first aspect of the present invention there is thus provided a Cartesian loop transmitter comprising a forward path and a feedback path (each of these paths comprising an I-channel and a Q-channel) as well as an isolator eliminator, said  
15 transmitter comprising:

- a first low pass filter and a first wide band pass filter connected to said I-channel at LP2;
- a second low pass filter and a second wide band pass filter connected to said Q-channel at LP2;
- 20 • a first root mean square detector collecting signal from said first wide band pass filter and from said second wide band pass filter;
- a second root mean square detector collecting signal from said first low pass filter and from  
25 said second low pass filter;
- a first divider connected to said first and said second root mean square detectors;
- a means for comparing connected to said first divider and to
- 30 • a microprocessor connected to input attenuators on said I- and Q-channels.

Preferably said Cartesian loop transmitter further comprising a first narrow band pass filter connected to  
35 said I-channel at LP2 and a second narrow band pass

filter connected to said Q-channel at LP2. Said two narrow band pass filters are connected to a third root mean square detector. Further a second divider is connected to said second and said third root mean square detectors and to said means for comparing.

According to a second aspect of the present invention there is thus provided a method of adjusting an output level of a Cartesian loop transmitter in a digital radio communication system. The method comprising the steps of generating a small signal at a predefined frequency offset and then applying a factory predefined attenuation setting for adjusting said output level if attenuation setting for a previous slot is not available or applying said attenuation setting obtained in previous slot for adjusting said output level in a current slot. Further steps are measuring an on-channel baseband signal level at LP2 and measuring said small signal level at a predefined frequency offset at LP2. In the following steps a first ratio of said small signal level to said on-channel baseband signal level is calculated. If said first ratio is above a first threshold then attenuation setting of an input signal is increased. In final step said attenuation setting is stored in a memory.

Preferably said on-channel baseband signal level is measured after filtering in low pass filter and said small signal level is measured after filtering in a wide band pass filter. Additionally said small signal level is also measured after filtering in a narrow band pass filter. Then a second ratio of said small signal level after filtering in said narrow band pass filter to said on-channel baseband signal level is calculated. If said

second ratio is below a second threshold then said attenuation setting of an input signal is reduced.

Characteristics of a Radio Frequency Power  
5 Amplifier (e.g. Adjacent Channel Power (ACP), output power, etc.) change under influence of Voltage Standing Wave Ratio (VSWR). The present invention beneficially allows adjusting a Cartesian loop output power by monitoring said Radio Frequency Power Amplifier (RFPA)  
10 nonlinearity.

Advantages of the present invention include:

- 1) The method does not rely on specific RFPA behaviour versus VSWR. The invention allows  
15 monitoring of Cartesian linearization loop small signal gain and adjusts the input signal.
- 2) The method does not require RFPA characteristic factory tuning.
- 3) The method reduce power fast if Cartesian loop  
20 gain is reduced due to VSWR (signal after filtering in said wide bandpass filter is taken for calculations). When loop gain returns to normal power the gain increase is slower to improve accuracy (signal after filtering in said  
25 narrow bandpass filter is taken for calculations).

#### Brief description of the drawings

The present invention will be understood and appreciated more fully from the following detailed  
30 description taken in conjunction with the drawings in which:

Fig. 1 is a schematic diagram illustrating a Cartesian loop transmitter in accordance with an  
35 embodiment of the present invention;



Fig. 2 is a flow chart illustrating a method of adjusting an output level of a Cartesian loop transmitter in accordance with an embodiment of the present invention;

5

Fig. 3 is a simplified diagram of a known in the art Cartesian feedback loop transmitter.

Detailed description of an embodiment of the invention

10 Referring to Fig. 1 a Cartesian loop transmitter circuit 100 according to one embodiment of the present invention is presented. Said Cartesian loop transmitter 100 incorporates a forward path 102, a feedback path 104 and an isolator eliminator 106. Said Cartesian loop  
15 transmitter 100 receives inputs at a baseband frequency in I- and Q-channels' attenuators, 108 and 110 respectively. Baseband signals from said attenuators 108 and 110 pass Cartesian loop summing junctions 112 and 114 to amplifiers and loop filters 116 and 118. Said  
20 baseband signals are then upconverted to radio frequency (RF) signals by upconverters 120 and 122. Said RF signals are then combined at a RF summer 124 and amplified by a Radio Frequency Power Amplifier (RFPA) 126 and then transmitted over the air from an antenna  
25 128.

Said feedback path 104 is supplied with a feedback signal from a directional coupler 130 which takes part of said RF signal from said forward path 102. Said  
30 feedback signal from said directional coupler 130 is downconverted to said baseband frequency by downconverters 132 and 134.

A local oscillator (LO) 136 generates a continuous wave RF carrier at the RF transmit frequency. A signal from said LO 136 is then applied to an I-channel up-converter 120 and an I-channel down-converter 132. Said  
5 LO 136 signal is also applied to a Q-channel up-converter 122 through a first 90 degree phase shifter 158 and to a Q-channel down-converter 134 through a second 90 degree phase shifter 160.

10 After applying mixing to baseband in said down-converters 132, 134 said feedback signal is passed to said first summing junctions 112 and 114 respectively.

Said isolator eliminator 106 monitors transmitted  
15 signals at LP2, i.e. after amplifiers and loop filters 116 and 118 and before upconverters 120 and 122. Said loop filters of 116 and 118 are baseband low pass filters that consist of poles and zeros.

20 With reference to Fig. 1 and 2 said isolator eliminator 106 continuously collects an on-channel baseband signal as well as additionally transmitted small signal at a predefined frequency offset in relation to a transmission channel from both said I- and  
25 Q-channels.

In one embodiment (for TETRA communication system) where TETRA modulation bandwidth is  $\pm 12.15$  kHz the small signal frequency offset can be  $\pm 12.5$  kHz (or -  
30 12.5 kHz). Said small signal preferably must be located outside of desired modulation signal bandwidth. I-channel LP2 signal is filtered through a centered, first narrow band pass filter 146 (band width 100Hz) and in parallel through a centered, first wide band pass filter 142

(band width 700Hz) at + 12.5 kHz (or -12.5 kHz) offset, whereas Q-channel LP2 signal is passed through a second narrow band pass filter 148 and a second wide band pass filter 144.

5

Said baseband signals from said I- and Q-channels are filtered by a first and a second 8 kHz band width low pass filters 138 and 140 respectively.

10 Then outputs from said wide band pass filters 142 and 144 and said narrow band pass filters 146 and 148 as well as said low pass filters 138 and 140 are passed through root mean square (RMS) detectors 150, 152 and 154 to a dividers 156 and 158. In a first divider 156 a  
15 first ratio of said small signal level after filtering in said wide band pass filters 142 and 144 to said on-channel baseband signal level is calculated. In a second divider 158 a second ratio of said small signal level after filtering in said narrow band pass filters 146 and  
20 148 to said on-channel baseband signal level is calculated.

Results of said calculation are passed to a means for comparing 160. Said means for comparing 160 sends  
25 signal HIGH\_1 if said first ratio (divider 156 output) exceeds a first threshold THR1. Signal HIGH\_2 is sent if said second ratio (divider 158 output) is below a second threshold THR2. Signal LOW is sent if said first ratio is below or equal THR1 and said second ratio is above or  
30 equal THR2.

Said signal from said means for comparing 160 is received by a microprocessor 162, which controls said

input attenuators 108 and 110 of said I- and Q-channels.  
If said signal from said means for comparing 160 is  
HIGH\_1 said microprocessor 162 sends command to said  
input attenuators 108 and 110 to increase input  
5 attenuation setting 224 by a first constant value. If  
said signal from said means for comparing 160 is HIGH\_2  
said microprocessor 162 sends command to said input  
attenuators 108 and 110 to reduce 228 input attenuation  
setting by a second constant value.

10

Said microprocessor 162 applies then a first or a  
second delay 226 and 230 to execution of software, which  
based on next samples, calculates said first and said  
second ratio and increases or reduces said attenuation  
15 setting. Said first and said second delays are  
implemented by not reading results of said means for  
comparing 160 for defined period of time. Said first and  
said second delays are applied to ensure that after  
increasing said attenuation setting the output of other  
20 elements of the circuit, i.e. said filters 138, 140,  
142, 144, 146 and 148 will be stable (filter step  
response transient effect will be over). Said first and  
said second delays' values can in one embodiment be  
equal and in another embodiment be different.

25

Said microprocessor 162 stores 232 said attenuation  
setting of said input attenuators 108 and 110 in a  
memory 164.

30 By using two types of band pass filters (narrow 146  
and 148 as well as wide 142 and 144) it is possible to  
apply different rates of change of attenuation. As  
increasing attenuation fast in situation when Cartesian  
loop small signal gain is reduced due to VSWR is

critical it is possible to use fast wide band pass filters 142 and 144 for calculation and decision on increasing attenuation 224. On the other hand reducing attenuation 228 is not critical and may be done slowly (and more accurately). For this purpose said small signal filtered in said narrow band pass filters 146 and 148 is used.

Fig. 2 shows a flow chart illustrating a method of adjusting an output level of a Cartesian loop transmitter 100 in a digital radio system according to one embodiment of the present invention.

In the first step 200 a small signal is generated at a predefined frequency offset. In one embodiment said small signal can be a sine wave tone. Said small signal is transmitted simultaneously with desired modulated TETRA signal. Said small signal level is about 30 dB below an on-channel signal level. In next step 201 it is checked whether said attenuation setting from previous slot are stored in said memory 164. If said data are available said Cartesian loop transmitter 100 is adjusted according to these setting 204. If this is a first slot in transmission and there are no said attenuation setting stored in said memory 164 a factory default setting is used 202 for adjusting said transmitter 100. When the transmitter 100 starts transmission said on-channel baseband signal level is measured 212 at LP2 after filtering in a low pass filter 205.1. Said small signal level is measured 214 and 216 after filtering in a wide band pass filter 205.2 and additionally after filtering in a narrow band pass filter 205.3.

Root mean square values of:

- 1) said on-channel signal level 212,
- 2) said small signal level after filtering in  
said narrow band pass filters 214,
- 3) said small signal level after filtering in  
said wide band pass filters 216

are taken for said measurement and for calculation of ratios of said small signal level to said on-channel baseband signal level 218.

If said first ratio is below or equal to said first threshold and said second ratio is above or equal to said second threshold then measurements of said on-channel baseband signal level 212 and said small signal level 214 and 216 are performed again.

If said first ratio exceeds said first threshold 220, said attenuation setting of said input attenuators 108 and 110 is increased 224 by a constant value. Additionally a first delay is applied 226 to execution of software, which based on next samples, calculates said ratio and increases said attenuation setting.

If said second ratio is below said second threshold 222, said attenuation setting of said input attenuators 108 and 110 is reduced 228 by a constant value. Additionally a second delay is applied 230 to execution of software, which based on next samples, calculates said ratio and increases said attenuation setting.

As during one time slot a plurality of samples are taken, the steps starting from measurement of said on-channel baseband signal level and of said small signal

level 212 to 216 through step of storing 232 of said attenuation setting are performed in a loop.

Below, with reference to Fig. 3, which is a simplified diagram of a known Cartesian loop transmitter 300, is a short explanation of theoretical background of the method of adjusting the output level of Cartesian loop transmitter according to an embodiment of the present invention.

10

RFFA 304 is biased in class AB. Its stand alone Adjacent Channel Power (ACP) is around 30 dB at nominal output power (1 Watt at antenna). RFFA ACP is improved by the Cartesian loop gain ( $\beta A$ ) at offset frequency of interest. Let assume that for 25 kHz offset a loop gain of 40 dB is designed. This means that close loop ACP at 25 kHz offset will be  $30+40=70$  dB. If said RFFA 304 is driven into compression by Voltage Standing Wave Ratio (VSWR) changes its small signal gain drops significantly. When such a RFFA 304 is driven into compression, while operating inside Cartesian feedback transmitter, the loop gain ( $\beta A$ ) will drop by the same amount as RFFA 304 small signal gain drops. For example if under some VSWR RFFA small signal gain drops by 10 dB then the loop gain ( $\beta A$ ) becomes  $40-10=30$  dB and resultant ACP at the antenna will be  $30+30=60$  dB. Resultant loop ACP will be degraded by the amount of RFFA small signal gain reduction.

30

With reference to Fig. 3 the transfer function between LP2 and TX signal input from Digital Signal Processor (DSP) can be examined.

$$\frac{V_{LP2}}{V_m} = \frac{ATT_m \cdot H(j\omega)}{1 + ATT_m \cdot H(j\omega) \cdot g \cdot \beta}$$

where

$H(j\omega)$  - is a loop filter transfer function;

$\beta$  - is a loop feedback 306 gain;

5  $g$  - is RFPA small signal gain,

$V_{in}$  - input voltage to the loop

$V_{LP2}$  - voltage after the loop filter 302

For  $ATT_n \cdot H(j\omega) \cdot g \cdot \beta \gg 1$  it can be approximated

10 
$$\frac{V_{LP2}}{V_{in}} \approx \frac{1}{g \cdot \beta}$$

Note that  $g$  is RFPA 304 small signal gain.

From this transfer function we can see that if RFPA  
15 304 gain drops due to VSWR the signal at LP2 will  
increase. This means that by looking at LP2 while  
transmitting we can estimate loop small signal gain  
change. It can be detected if said small signal gain of  
the loop drops and the drive to the loop can be reduced  
20 by increasing attenuation of input attenuators 308 that  
are located before the loop summing junction.

To accurately estimate loop small signal gain  
changes together with baseband signal a small signal is  
25 transmitted. The small signal is transmitted at +12.5  
kHz (or -12.5 kHz) offset. The power of this small  
signal will be 30 dB below the baseband signal  
transmitted power. Under such conditions this small  
signal will not have any influence on baseband signal 25  
30 kHz ACP. Said small signal is detected at LP2 by passing  
it through bandpass filter and its root mean square  
voltage is monitored.

Said generated small signal is always K (e.g. K=-30dB)  
below the baseband signal power. So at the loop input:



$$\frac{P_{in}(small\ signal)}{P_{in}(baseband)} = K$$

At LP2 level of said baseband signal  $P_{LP2}(baseband)$  and level of said small signal  $P_{LP2}(small\ signal)$  are measured. Relation between ratios of input signals and signals measured at LP2 may be described as follow:

$$R = \frac{\frac{P_{LP2}(small\ signal)}{P_{LP2}(baseband)}}{\frac{P_{in}(small\ signal)}{P_{in}(baseband)}} = \frac{P_{LP2}(small\ signal)}{P_{LP2}(baseband)} \cdot \frac{P_{in}(baseband)}{P_{in}(small\ signal)} = \frac{P_{LP2}(small\ signal)}{P_{LP2}(baseband)} \cdot \frac{1}{K}$$

It is evident that in the linear region R will be equal to 1. But when RFPA will be driven into compression said small signal power at LP2 will increase and thus the ratio  $\frac{P_{LP2}(small\ signal)}{P_{LP2}(baseband)}$  will increase. So in the compression region R will become larger than 1. Cartesian loop transmitter according to the present invention controls input loop attenuators for keeping the ratio R at some pre-defined range (between thresholds THR1 and THR2) and at the same time keeping ACP within limit.

In one embodiment, the isolator eliminator 106 is implemented in software executable on a Digital Signal Processor (DSP). A software implementation is relatively low cost and allows easy reconfiguration. However hardware implementation is also possible. Nevertheless, it will be appreciated that the present invention may be implemented hardware or software and may be used in radio communication devices.

Claims

1. A Cartesian loop transmitter (100) comprising a  
 5 forward path (102) and a feedback path (104), each  
 of these paths comprising an I-channel and a Q-  
 channel, as well as an isolator eliminator (106)  
 characterized in that said transmitter (100)  
 comprising:
  - 10 a) a first low pass filter (138) and a first wide  
 band pass filter (142) connected to said I-channel  
 at LP2;
  - b) a second low pass filter (140) and a second wide  
 band pass filter (144) connected to said Q-channel  
 at LP2;
  - 15 c) a first root mean square detector (150) collecting  
 signal from said first wide band pass filter (142)  
 and from said second wide band pass filter (144);
  - d) a second root mean square detector (152)  
 20 collecting signal from said first low pass filter  
 (138) and from said second low pass filter (140);
  - e) a first divider (156) connected to said first and  
 said second root mean square detectors (150 and  
 152);
  - 25 f) a means for comparing (160) connected to said  
 first divider (156) and to
  - g) a microprocessor (162) connected to input  
 attenuators (108 and 110) on said I- and Q-  
 channels.
  - 30
2. The Cartesian loop transmitter according to claim 1  
 further comprising:
  - a) a first narrow band pass filter (146) connected to  
 said I-channel at LP2;

- b) a second narrow band pass filter (148) connected to said Q-channel at LP2;
  - c) a third root mean square detector (154) collecting signal from said first narrow band pass filter (146) and from said second narrow band pass filter (148);
  - d) a second divider (158) connected to said second and said third root mean square detectors (152 and 154) and to said means for comparing (160).
3. The Cartesian loop transmitter according to claim 1 or 2 wherein a memory (164) is connected to said microprocessor (162).
4. The Cartesian loop transmitter according to any one of preceding claims wherein a generator (166) is connected to said microprocessor (162).
5. The Cartesian loop transmitter according to claim 4 wherein said generator is a sine wave generator.
6. A method of adjusting an output level of a Cartesian loop transmitter (100) in a digital radio system, the method comprising the steps of:
- a) generating a small signal (200) at a predefined frequency offset;
  - b) applying a factory predefined attenuation setting (202) for adjusting said output level if attenuation setting for a previous slot is not available (201), or
  - c) applying said attenuation setting obtained in previous (204) slot for adjusting said output level in a current slot;
  - d) measuring an on-channel baseband signal level (212) at LP2;

- e) measuring said small signal level (214) at a predefined frequency offset at LP2;
  - f) calculating a first ratio (218) of said small signal level to said on-channel baseband signal level; and
  - g) increasing an attenuation setting (224) of an input signal if said first ratio is above a first threshold (220);
  - h) storing (232) said attenuation setting in a memory.
7. The method according to claim 6 wherein said small signal level is measured after filtering in a wide band pass filter (205.2).
8. The method according to claim 6 or 7 wherein said on-channel signal level is measured after filtering in a low pass filter (205.1).
9. The method according to any one of claims 6 to 8 further comprising steps:
- e1) measuring said small signal level (216) after filtering in a narrow band pass filter (205.3) at said predefined frequency offset at LP2;
  - f1) calculating a second ratio (218) of said small signal level after filtering in said narrow band pass filter to said on-channel baseband signal level; and
  - g1) reducing said attenuation setting (228) of an input signal if said second ratio is below a second threshold (222).
10. The method according to any one of claims 6 to 9 wherein steps d) through h) are repeated in a loop until said first ratio and said second ratio are

between said first and said second thresholds and until there is a modulated signal to transmit.

- 5      11. The method according to any one of claims 6 to 10 wherein for determining said first or said second ratio root mean square values of said on-channel baseband signal level (212) and a root mean square of said small signal level (214 and 216) are taken.
- 10    12. The method according to any one of claims 6 to 11 wherein after increasing said attenuation setting a first delay is applied (226) to execution of software, which based on next samples, calculates said first and said second ratio and increases said  
15      attenuation setting.
- 20    13. The method according to any one of claims 6 to 11 wherein after reducing said attenuation setting a second delay is applied (230) to execution of software, which based on next samples, calculates said first and said second ratio and increases said  
25      attenuation setting.
- 30    14. The method according to any one of claims 6 to 13 wherein said small signal is generated on a level significantly below said on-channel signal level.
- 35    15. A radio transmitter according to any one of claims 1 to 5 and which is operable to provide communications in at least TETRA and/or GSM and/or IDEN communication systems.
- 35    16. A radio communication device incorporating a circuit according to any one of claims 1 to 5.

17. A radio communication device operating in accordance with a method according to any one of claims 6 to 14.

Abstract

Cartesian Loop Transmitter And Method Of Adjusting An  
Output Level Of Such Transmitter

5  
10  
15  
20  
25  
In accordance with the present invention there is those provided a Cartesian loop transmitter (100) having an isolator eliminator circuitry (106) comprising a set of low pass (138, 140) and wide band pass (142, 144) as well as narrow band pass (146, 148) filters for each of I- and Q-channels, root mean square detectors (152, 154, 156) and dividers (156, 158) connected to a means for comparing (160). Signals from said means for comparing (160) are received by a microprocessor (162) which controls attenuation setting. There is also provided a method of adjusting an output level of such transmitter (100). Said method comprises the step of generating a small signal (200) measuring an on-channel signal level (212) and said small signal level (214, 216) and then calculating a first ratio (218) of said small signal to said on-channel signal. If said first ratio exceeds a defined threshold (220) said attenuation setting is increased (224).

Figure 1 to accompany the Abstract

0073616-04-Jul-03 11:50



2/3


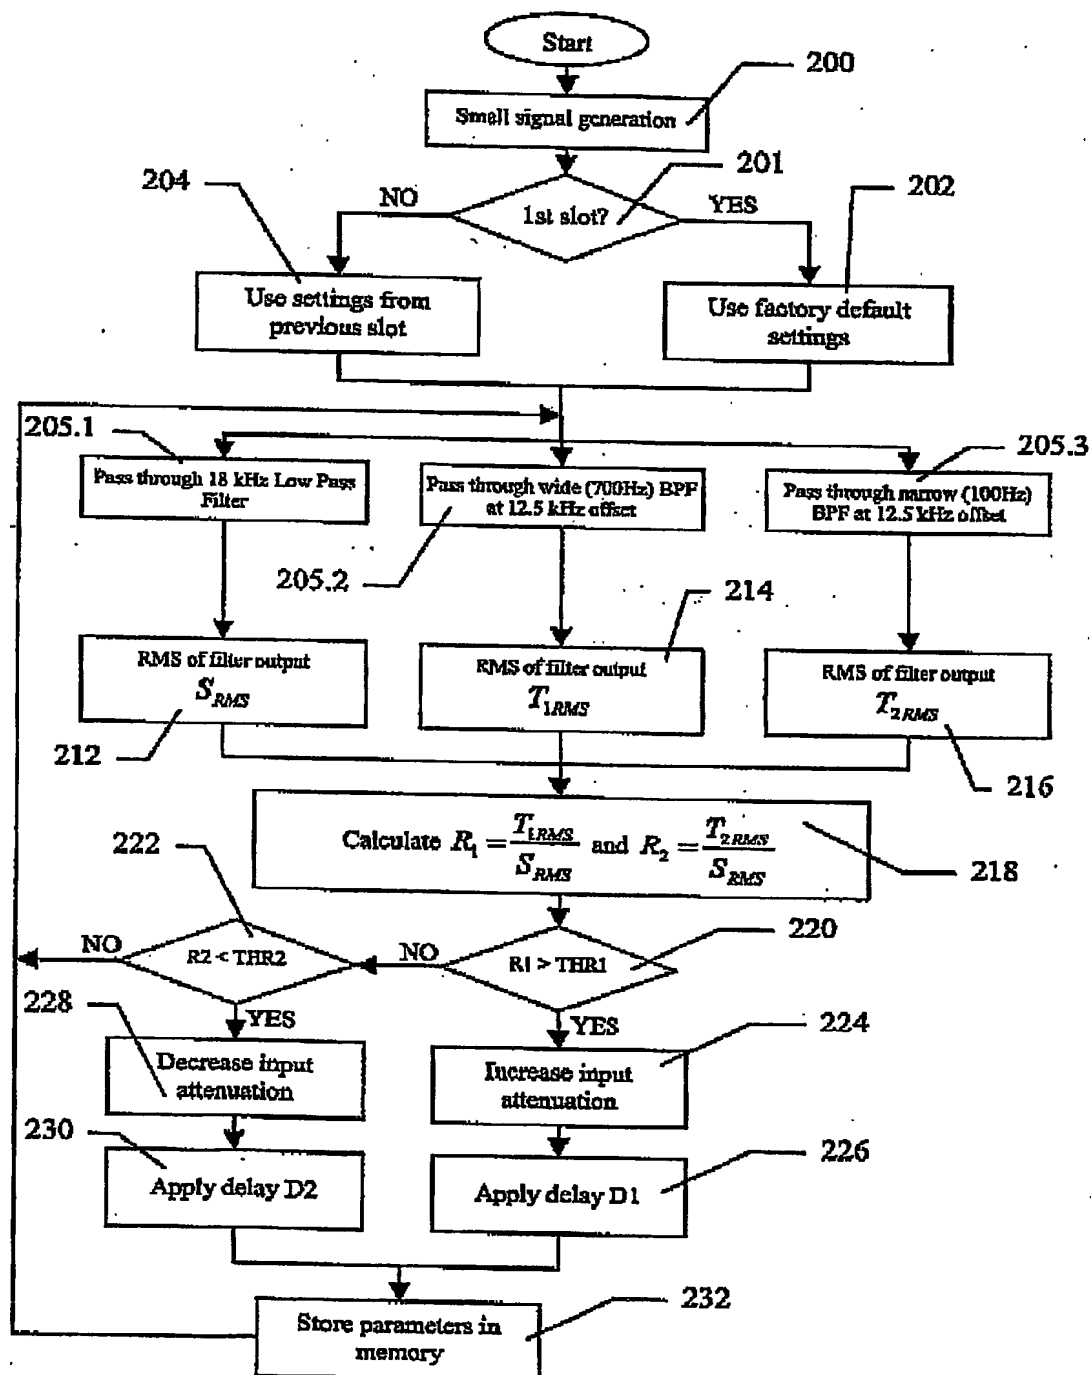


FIG. 2

3/3



PCT/EP2004/050876



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**